


## GENERAL PURPOSE PROBE ASSEMBLIES

### TYPE AT

#### Closed end Aluminum Tube

- Low cost deep draw housing.
- Available in standard or black-anodized finish.
- Standard size is 0.187 in OD x 1.5 in. long.
- Fast thermal response time.
- Specify RTD or Thermistor sensor, wire or cable type and length, and operating temperature range.

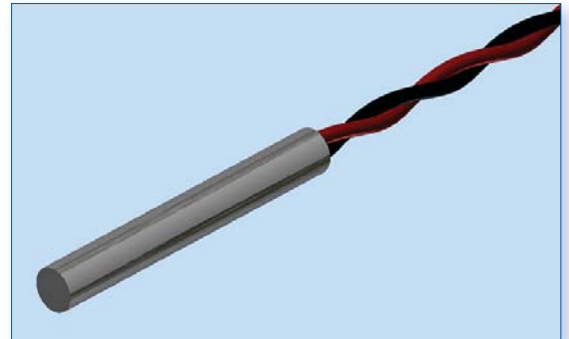

### TYPE BT

#### Closed end Brass Tube


- Low cost deep draw or machined, closed end housing.
- Available in standard or nickel-plated finish
- Diameters from 0.156 in. to 0.375 in.
- Specify RTD or Thermistor sensor, wire or cable type and length, and operating temperature range.



### TYPE PT

#### Closed end Plastic or Epoxy Tube

- Available in variety of materials including PVC, Nylon, DAP, Teflon and others.
- Diameters from 0.125 in. to 0.375 in.
- Lengths from 0.5 in to 2.0 in.
- Specify RTD or Thermistor sensor, wire or cable type and length, and operating temperature range.

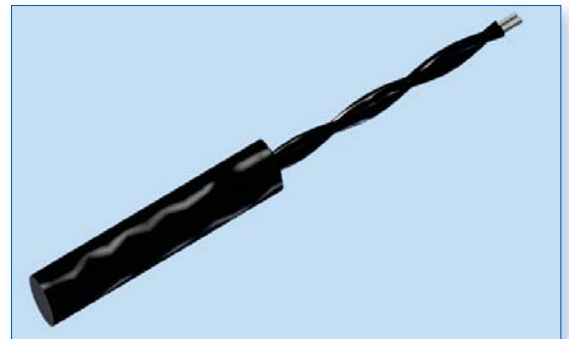

### TYPE ST

#### Closed end Stainless Steel Tube

- Type 304 and 316 materials for corrosion resistance
- Standard diameters from 0.062 in. to 0.375 in.
- TIG welded end round tip for high reliability.
- Specify RTD or Thermistor sensor, wire or cable type and length, and operating temperature range.

